

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

**BB**

22 Jan. 1999/ 1370.002/ WFR

File 351:DERWENT WPI 1963-1998/UD=9902;UP=9902;UM=9902  
(c)1999 Derwent Info Ltd

Set Items Description

?s pn=DE 19641374

S2 1 PN=DE 19641374

?t s2/2/1

011602955 \*\*Image available\*\*

WPI Acc No: 98-020083/199803

XRPX Acc No: N98-015198

Device for production of brush seals - has deflector roller determining input position of brushes into brush accommodation shaft held stationarily in relation to brush accommodation shaft for determining shaft entry

Patent Assignee: MTU MUENCHEN GMBH (MOTU )

Inventor: EICHNER J; HOFFMUELLER W; PRIESCHL F

Number of Countries: 019 Number of Patents: 002

Basic Patent:

Patent No	Kind	Date	Applicat No	Kind	Date	Main IPC	Week
DE 19641374	C1	19971218	DE 1041374	A	19961008	F16J-015/16	199803 B

Priority Applications (No Type Date): DE 1041374 A 19961008

Designated States (National): JP; US

Designated States (Regional): AT; BE; CH; DE; DK; ES; FI; FR; GB; GR; IE; IT; LU; MC; NL; PT; SE

Abstract (Basic): DE 19641374 C

Synchronously with the adjustment of the brush accommodation shaft (13), a belt is feedable over the deflector roller and can be fitted in the area of the base (21) of the brush accommodation shaft. The belt in the area of the shaft is at least a component part of an end shaft wall (19).

The brush accommodation shaft contains a removable end shaft wall, so that a connecting area (36) of the brushes (12) is releasable with the at least one brush cheek in the brush accommodation shaft. The brush accommodation shaft contains a ring groove or a ring groove section and an end shaft wall covering the ring groove or the ring groove section.

ADVANTAGE - The production of brush seals is simple and efficiency of the process is enhanced with regard to manufacturing speed.

Dwg. 1/9

Title Terms: DEVICE; PRODUCE; BRUSH; SEAL; DEFLECT; ROLL; DETERMINE; INPUT; POSITION; BRUSH; BRUSH; ACCOMMODATE; SHAFT; HELD; STATIONARY; RELATED; BRUSH; ACCOMMODATE; SHAFT; DETERMINE; SHAFT; ENTER

Derwent Class: P24; Q65

International Patent Class (Main): A46D-003/05; F16J-015/16

International Patent Class (Additional): A46D-003/00; F16J-015/32

File Segment: EngPI

38

THIS PAGE BLANK (USPTO)

22 Jan. 1999/ 1370.002/ WFR

File 351:DERWENT WPI 1963-1998/UD=9902;UP=9902;UM=9902  
(c)1999 Derwent Info Ltd

Set Items Description  
-----

?s pn=de 19641374

S1 1 PN=DE 19641374

?t s1/3/1

011602955 \*\*Image available\*\*

WPI Acc No: 98-020083/199803

XRPX Acc No: N98-015198

Device for production of brush seals - has deflector roller determining  
input position of brushes into brush accommodation shaft held  
stationarily in relation to brush accommodation shaft for determining  
shaft entry

Patent Assignee: MTU MUENCHEN GMBH (MOTU )

Inventor: EICHNER J; HOFFMUELLER W; PRIESCHL F

Number of Countries: 019 Number of Patents: 002

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Main IPC	Week
-----------	------	------	-------------	------	------	----------	------

DE 19641374	C1	19971218	DE 1041374	A	19961008	F16J-015/16	199803 B
-------------	----	----------	------------	---	----------	-------------	----------

WO 9815209	A1	19980416	WO 97EP5356	A	19970930	A46D-003/05	199821
------------	----	----------	-------------	---	----------	-------------	--------

Priority Applications (No Type Date): DE 1041374 A 19961008

Filing Details:

Patent	Kind	Filing Notes	Application	Patent
--------	------	--------------	-------------	--------

WO 9815209	A1			
------------	----	--	--	--

Designated States (National): JP US

Designated States (Regional): AT BE CH DE DK ES FI FR GB GR IE IT LU MC  
NL PT SE

Language, Pages: DE 19641374 (18); WO 9815209 (G, 37)

THIS PAGE BLANK (USPTO)

IBM

# Intellectual Property Network


[IPN Home](#)

[Search](#)

[Shop](#)

[Feedback](#)

[Help](#)



## WO9815209A1: METHOD AND DEVICE FOR THE MANUFACTURE OF BRUSH SEALS

[View Images \(38 pages\)](#) | [Order Patent](#)

Inventor(s)

HOFFMÜLLER, Wilhelm , Rudhartstrasse 11, D-80999 München, Germany  
EICHNER, Josef , Eichenstrasse 10c, D-85298 Scheyern, Germany  
PRIESCHL, Franz , Maibaumstrasse 16, D-85293 Reichertshausen, Germany

Applicant(s)

MTU MOTOREN- UND TURBINEN-UNION MÜNCHEN GMBH, Postfach 50 06 40, D-80976 München, Germany

Issued/Filed Dates

N.A. / Sept. 30, 1997

Application Number

WO1997EP0005356

IPC Class

A46D 003/05; F16J 015/32

Priority Number(s)

DE1996196413745

Designated Countries

JP, US, European patent: AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE

Abstract

The invention relates to a method for the manufacture of brush joints consisting of the following steps: stacking of bristles in an accommodating shaft so that the bristles are situated in part close to location for at least one brush face; movement of shaft accommodating bristles in synchronization with stacking of bristles relative to insertion point of bristles in accommodating shaft so that the surface position of bristles stacked in accommodating shaft remains at least substantially constant; fastening of bristles on at least one bristle face in accommodating shaft, and withdrawal of at least one brush face with bristles fastened thereon from the accommodating shaft. The invention also relates to a device for the production of brush seals enabling the above-mentioned method to be carried out.

[\[Show "fr" Abstract\]](#)

[\[Show "de" Abstract\]](#)

Attorney, Agent or Firm

MTU MOTOREN- UND TURBINEN-UNION MÜNCHEN GMBH;

Foreign References

none

(No patents reference this one)

Powered by DB2 and NetData

Alternate Searches

 [Patent Number](#)

 [Boolean Text](#)

 [Advanced Text](#)

**PatentMizer**

SEARCH PATENT FULL TEXT WITH NATURAL LANGUAGE

Legal

IBM

BEST AVAILABLE COPY

THIS PAGE BLANK

1/22/99 1:47 PM

**THIS PAGE BLANK (USPTO)**



BB


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B05B 5/00</b>		A1	(11) International Publication Number: <b>WO 95/24272</b>
		(43) International Publication Date: 14 September 1995 (14.09.95)	
(21) International Application Number: PCT/SE95/00237		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 6 March 1995 (06.03.95)			
(30) Priority Data: 9400804-2 6 March 1994 (06.03.94) SE 9500229-1 24 January 1995 (24.01.95) SE			
(71) Applicant (for all designated States except US): SEALFLOCK AKTIEBOLAG [SE/SE]; P.O. Box 1006, S-430 90 ÖCKERÖ (SE).		Published With international search report. In English translation (filed in Swedish).	
(72) Inventors; and (75) Inventors/Applicants (for US only): ALM, Kjell, K. [SE/SE]; Olivedalsgatan 9, S-413 10 Göteborg (SE). PETERSSON, Raymond [SE/SE]; Kärrslätt 501, S-440 60 Skärhamn (SE).			

(54) Title: METHOD AND DEVICE FOR APPLICATION OF FIBRES ON A SURFACE

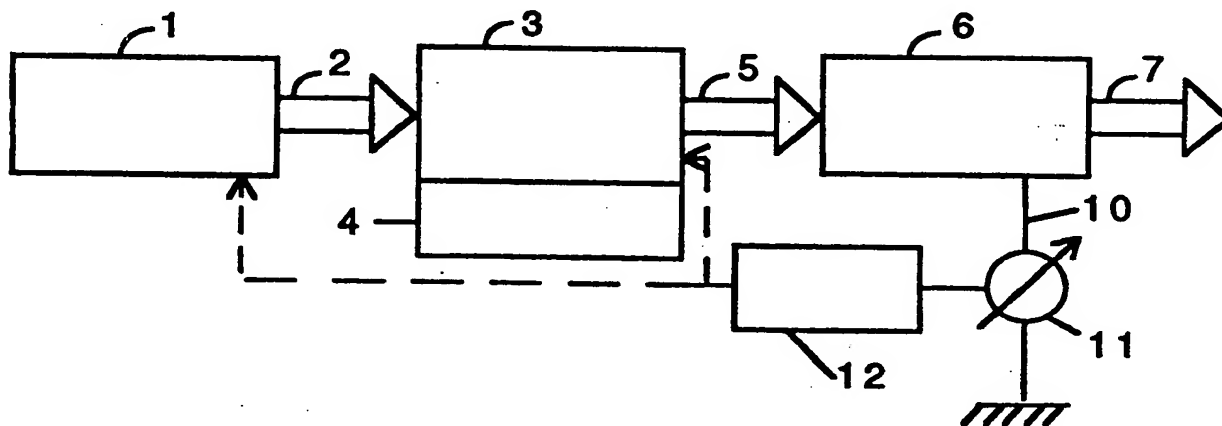

## (57) Abstract

The invention refers to a method and a device for application of fibres on a base. The problem that is solved by the present invention is to charge and convey fibres to a surface, on which the fibre is going to be applied, without need of using electrically powered units to generate a high voltage. This is carried out by friction charging of the fibre. This is achieved by using differences in electro-negativity between two materials. The application equipment includes a charging tube (8), through which the fibre is driven. The inside of the charging tube (8) consists of a dielectric material (9), for instance PTFE. This material is strongly electro-negative and therefore tears electrons from materials that have less electro-negativity.

AB

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## Method and Device for Application of Fibres on a Surface.

### State of the art:

When applying fibres on a base an electrostatic method is frequently used, by which a high voltage is used to charge the fibres and bring them towards a surface. Similar methods are also used to apply powder on a base.

### The technical problem:

The problem that is solved by the present invention is to charge and convey fibres to a surface, on which the fibre shall be applied, without need of using electrically powered units to generate a high voltage. The problem to control the supply of fibres is also solved.

### The solution:

The problem is solved by friction charging of the fibre. This is carried out by using differences in electro-negativity between two materials. The application equipment includes a charging tube, through which the fibre is driven. The inside of the charging tube consists of a dielectric material, for instance PTFE (polytetrafluorethylene). This material is strongly electro-negative and therefore tears electrons from a material that has less electro-negativity. By controlling and regulating both the amount of material and particle velocity through the charging tube, one may optimize the process regarding to particle charge. The surplus of electrons in the charging tube is evened out by this being made of an electrically conducting material which is earthed via an earth wire. Through this an electric current is flowing which is caused by the electron migration between the dielectric material of the charging tube and the material that is going to be applied. This enables read-out of the charging course by measuring the current in the earth wire.

The application material consists of fibres of various materials. Examples of materials are: Polyamide, Polyester and similar materials. When a fibre becomes charged the charge is bound in its surface. An electrostatic field

originates from the charged surface. The force of the electric field is determined by the amount of charge. In an angular particle such as the fibre, the ends operate as electrodes, which release part of the charge to the environment. Therefore a strongly charged particle will emit part of the charge to the surrounding air, which then will be ionized. This indicates that there is a saturated charge that a particle of a certain shape may carry.

10 The present invention thus refers to a method of application of fibres on a base, by which the base is provided with an adhesive and the fibres are given an electric charge through friction against a dielectric material and is directed towards the base. The invention also refers to the dielectric material being applied to a surface of conducting material which by means of an earth wire is connected to earth and that the electric current that flows in the earth wire is measured and constitutes a measure of the amount of fibres that has been charged and that this current is used to control the amount of fibres that are added so that this will be the intended. The added fibre quantity thereby can be controlled by means of a dosage device and a fan device.

25 The invention also refers to a device for application of fibres on a base, which includes at least one surface of a dielectric material against which the fibres are directed by means of a dosage device and a fan device and that the through friction electrically charged fibres are directed towards the base. This can be designed such, that the dielectric material is applied on at least one surface of conducting material which by means of an earth wire is connected to earth and that the electric current that flows through the earth wire is measured and constitutes a measure of the amount of fibres that has been charged and that this current is used to control the amount of fibres that is added by means of the dosage device and the fan device so that the amount will be the intended.

An embodiment of the present invention is shown

diagrammatically in the drawing, in which

Figure 1 shows the basic design of a device according to the invention, and

Figure 2 shows the function of an application nozzle.

5 As shown in Figure 1 a fan unit 1 is provided to emit an air flow 2 to a dosage device 3 of fibres which can be provided with a container 4 from which the fibres are taken. The dosage device 3 emits a second air flow 5 containing fibres to the application device 6, in which the fibres are charged electrostatically so that a flow 7 of air with charged fibres is emitted. Figure 2 shows that the second air flow 5 with primarily uncharged fibres in the application device are directed towards a surface 9 of for instance a tube shaped part 8 of metal, whereby the surface 9 is coated with PTFE or other material which gives the fibres in the flow 7 electric charge. The part 8 of metal is connected to earth through the earth wire 10, in which the current is measured by the measuring device 11. The value of the measured current constitutes the output value of a control device 12, which in dependence of this and a set desired value emits a control signal to the dosage device 3 and possibly also to the fan 1.

25 The adhesive that is used in order to make the fibre stick on the base is frequently a two-component resin glue and the fibres are generally synthetic fibres of for instance polyamide. The fibres which may be used for the present invention are however not limited to any special type, but also for instance coal fibres, glass fibres or the like may be used.

30 The fibre density, by which the application according to the present invention normally is carried out, may be in the range 50-300 fibres per square mm, preferably more than 150 fibres per square mm, with a fibre thickness smaller than 0.1 mm, preferably less than 0.05 mm and a length in the range of 0.5-5 mm, preferably less than 3 mm.

35 The invention is not limited to the above embodiments but can be varied in different ways within the scope of the claims.

## CLAIMS

1, A method for application of fibres on a base, wherein the base is provided with an adhesive and that the fibres are electrically charged by friction against a dielectric material and are directed towards the base.

2. A method according to claim 1, wherein the dielectric material is applied on a surface of a conducting material which is connected to earth through an earth wire, the electric current that flows in the earth wire is measured and forms a measure of the amount of fibres being charged, and this current is used to control the amount of fibres being added to an intended value.

3. A method according to claim 2, wherein the amount of fibres is defined by a dosage device and a fan device.

4. A method according to any of claims 1-3, wherein the length of the fibres is between 0.5 and 5 mm and they are applied with a density in the range of 50-300 fibres per square mm.

5. A device for application of fibres on a base, including at least one surface (9) of a dielectric material towards which the fibres are directed and that the fibres, electrically charged by the friction, are directed towards the base.

6. A device according to claim 5, wherein the fibres are directed towards the surface (9) by means of a dosage device (3) and a fan device (1).

7. A device according to claim 5 or 6, wherein the dielectric material (9) is applied on at least one surface of a conducting material (8) which by an earth wire (10) is connected to earth and that the electric current in the earth wire is measured and forms a measure of the amount of fibres being charged, said electrical current is used to control the amount of fibres being added.

8. A device according to any of claims 5 - 7, wherein the length of the fibres is between 0.5 and 5 mm and they are applied with a density in the range of 50-300 fibres per square mm.

1/1

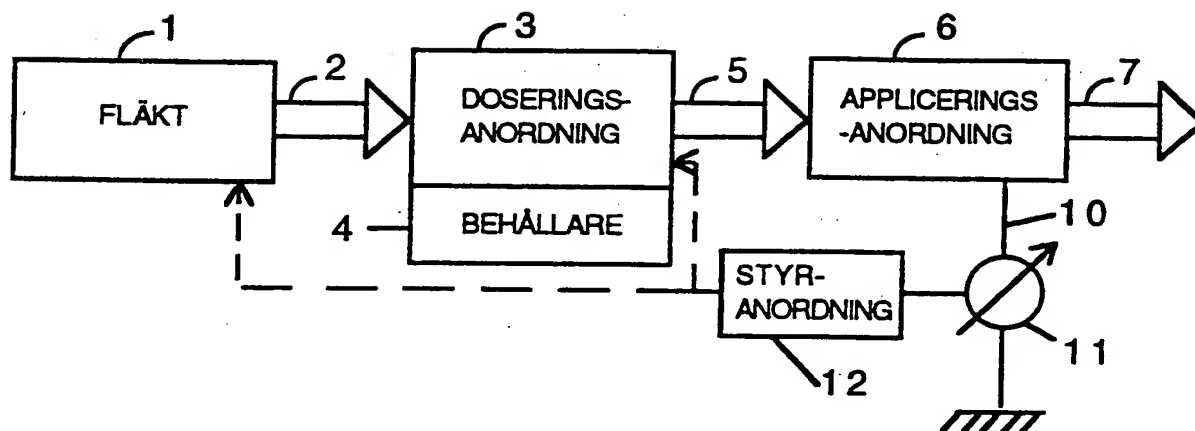


Fig.1

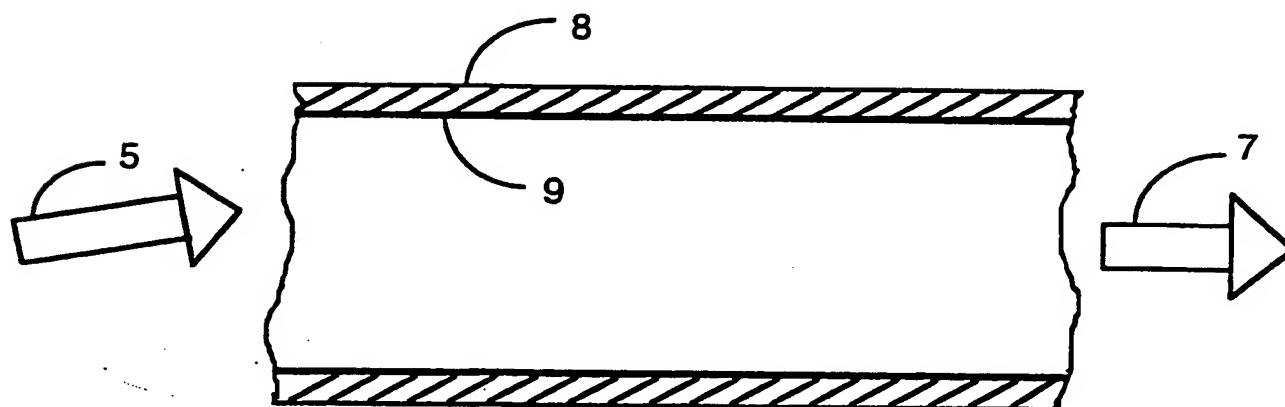


Fig.2



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00237

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B05B 5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B05B, B05C, B05D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4879969 (TOMOJI HARANOYA ET AL), 14 November 1989 (14.11.89), claims 1-7, abstract	1
X	US, A, 4031270 (TRACY W. BARNES), 21 June 1977 (21.06.77), abstract	1
A	EP, A1, 0592137 (NORDSON CORPORATION), 13 April 1994 (13.04.94)	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

12 June 1995

Date of mailing of the international search report

26 -06- 1995

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Johan von Döbeln  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00237

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP, A1, 0627265 (MATSUO SANGYO CO., LTD.), 7 December 1994 (07.12.94)  -----	1-7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

03/05/95

International application No.

PCT/SE 95/00237

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US-A-	4879969	14/11/89	AU-B-	605776	24/01/91
			AU-A-	7597387	04/02/88
			CA-A-	1300475	12/05/92
			DE-A,C-	3724176	04/02/88
			FR-A-	2601887	29/01/88
			GB-A,B-	2195924	20/04/88
			JP-C-	1796176	28/10/93
			JP-B-	5003349	14/01/93
			JP-A-	63036860	17/02/88
			KR-B-	9310301	16/10/93
			US-A-	4774645	27/09/88
			JP-A-	63065968	24/03/88
-----					
US-A-	4031270	21/06/77	NONE		
-----					
EP-A1-	0592137	13/04/94	NONE		
-----					
EP-A1-	0627265	07/12/94	NONE		
-----					

THIS PAGE BLANK (USPTO)